


SETTING UP THE 5874F1

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Place the fountain on your prepared site and turn it toward your intended viewing angle.

2) Use the supplied silicone sealant to mount the three Copper Spill Plates to the three waterfall shelves. For each one, lay a solid line of silicone across the waterfall shelf then press the copper plate evenly, down into the sealant. Make sure to position the plates to overhang the front of the fountain by as much as ¼". This will help the water to break cleanly.

3) Set the Pump and the Light in the fountain basin. Push their power cords out the hole in the back of the fountain and toward your power source. Hold the Rubber Stopper near the hole in the fountain. Place the power cords in the molded holes (pump cord in larger hole) and close the slit. Then press the stopper into the hole until it is snug and watertight.

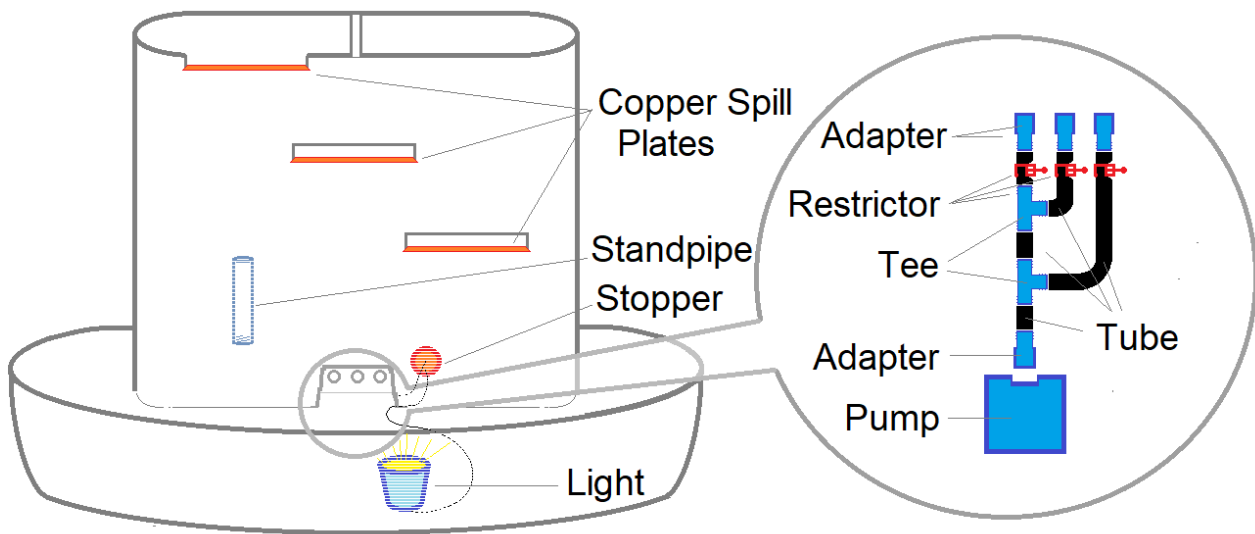

4) Working from top to bottom per the drawing at the right, thread three Adapters into the couplings inside the fountain's connection area, as shown. Next, push the short, medium, and long tubes – in order – over the adapters and install the Flow Restrictors over these tubes, just tight enough to hold them in place. Then push the tees and connecting short tubes together to complete this assembly. Thread the final adapter into the pump and connect the remaining open tube to this adapter.

5) Tips: Position your light front and center. Thread standpipe inside under the highest waterfall to help contain water better. Once all is running, you can balance the water flows from the three waterfalls by tightening the flow restrictors to your liking.

6) Finally, fill the basin with water. Read pump and light instructions. Turn on the pump and light. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

Csd 4/2023

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pump and light.
- * Remove plug/stopper to let all moisture out. Keep drain open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.