

SETTING UP THE 4715F1



Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Place 4715F1 Fountain on your prepared site.

2) Set the Pump in the back of the basin area and set the Light in the front center where it can shine on the water action. Push both power cords out through the hole in the back (*right of center*) wall. Open the slit in the Rubber Stopper and position the power cords in the pre-molded grooves (*larger pump cord fits in the center, larger hole*) then close the slit and mush the stopper into the hole in the wall. Leave about 1/8" of the stopper out of the hole for future ease removing the stopper.

3) Thread the three Barbed Adapters into place. Two belong under the inner ledge of the fountain as shown and the third fits in the top of the pump.

4) Push the short Water Tube onto the pump adapter. Push the middle leg of the Tee onto the pump's water tube. Push the remaining tubes onto the end legs of the tee. Then push each of these tubes onto the adapters under the inner ledge.

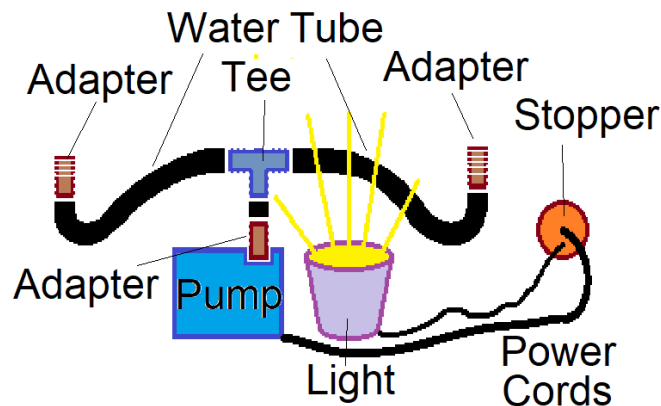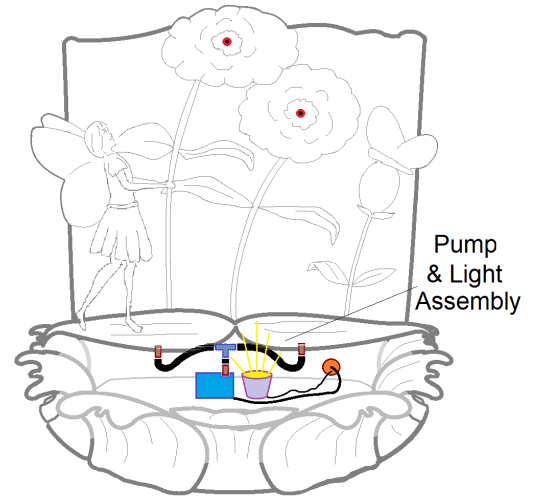

5) Fill the basin with water. Read pump and light instructions. Connect the light cord to the transformer and plug in. Plug in the pump. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Csd 10/2023

Online Resources
Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.