

SETTING UP THE 5019F2

1) Place your fountain Basin on your prepared site. Turn it so the power cord groove underneath faces your power supply. Check to make sure it is level.

2) Place Pump and Light in the Basin cavity (as shown) and run their power cords down through the center hole and out through the cord groove underneath. Open the slit in the rubber stopper and place the cords in the pre-molded slots (pump cord in the larger slot). Then close the slit and mush the stopper into the center hole, leaving about 1/8" of it above the floor level for ease of future removal.


3) Thread one of the Adapters into the top of the pump. Thread the other Adapter into the underside of the 5019 Bolla Top fountain piece. Push one end of the water tube onto the pump adapter.

4) With plenty of help, hold the Bolla Top over the pump and push the open end of the water tube onto its adapter. Then set the Top down on The Basin.

5) Use the Silicone Sealant provided to affix the three Copper Spill Plates into position as shown. The smallest plate fits at the top, the largest as the bottom. Lay a complete bead of silicone all the way across each water spill area and press each spill plate firmly into the sealant. The water will flow best if each plate overhangs the front of the spill area by up to 1/4 inch.

6) Fill all bowls and pool with water. Read pump and light instructions. Connect the light cord to the transformer and plug in. Plug in the pump. If it does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Use shims to level the fountain as needed. Csd 10/2023

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

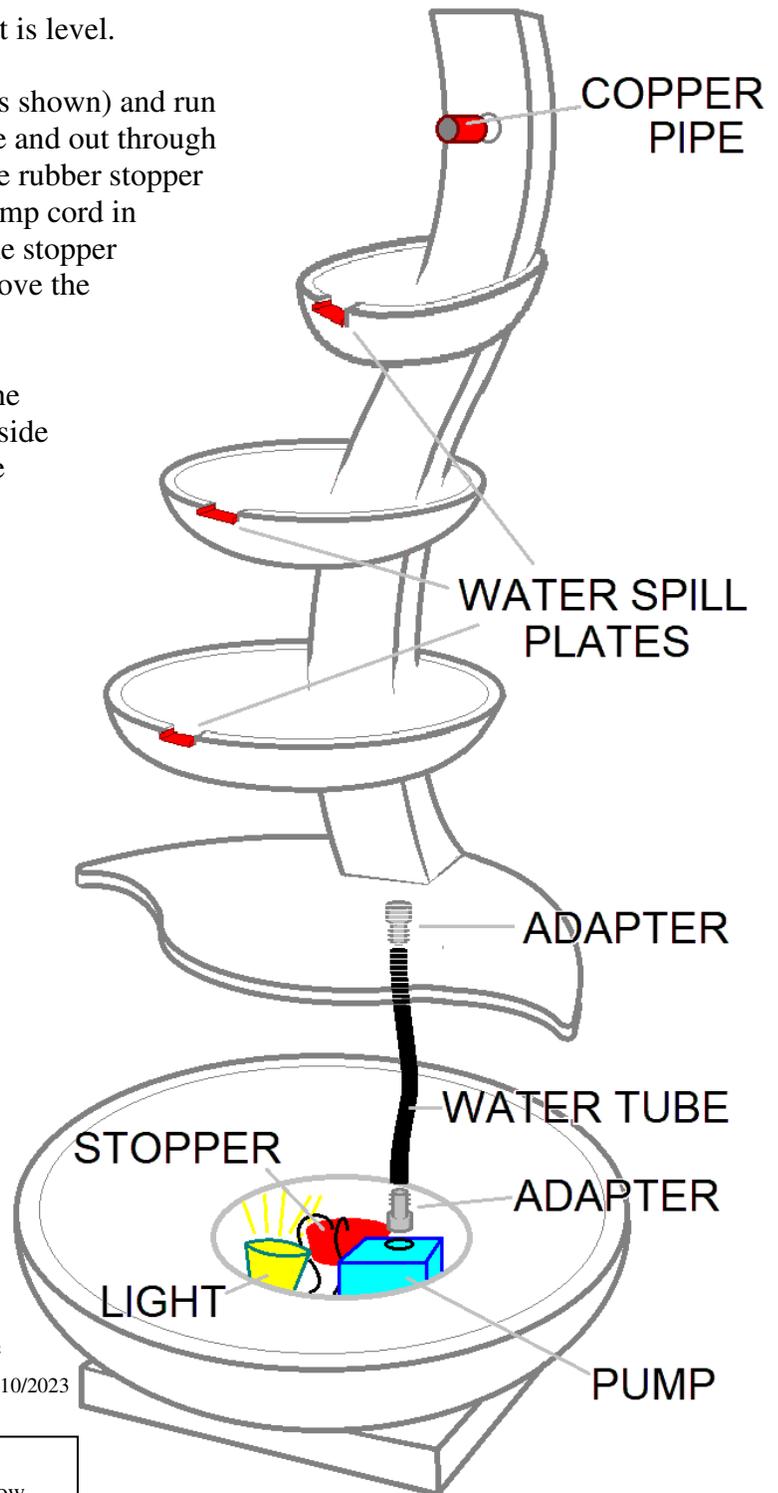

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.