


For best results, locate a suitable site for your fountain that is leveled and provides pleasing viewing angles.
 Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

5513F10

1. Locate a suitable site for your Quattro Tier In Valencia Fountain, 10 pc. Site should be level and provide a pleasing viewing angle. You should always follow local electrical codes and use a 110V GFCI protected outlet.
2. Locate the 6504 Pool in the center of your site. Bowl must be level.
3. Place P15 Pump next to Standpipe. Slip pump cord through standpipe and pull cord out from bottom of pool. Seal cord with RS1.5 rubber stopper and corks. Corks will be removed if order AB8740 lights.
4. Connect ADAPTER 1" MNPT X 3/4" BARB to pump. Connect NKT3/4" Tubing X 36" to adapter on pump. CLAMP MEDIUM SS to secure tubing.
5. As you set 7715 Pedestal in center of Pool feed Tubing through 7715 Pedestal. Measure between other side of base and the pool wall to make sure the base is centered.
6. Place 6615 Bowl on top of 7715 Pedestal. Feed tubing through the opening of the 6615 Bowl. Level 6615 with Shims if necessary.
7. Attach STP1" X 8" Stand Pipe to 6615 Bowl and feed Tubing through Standpipe. Connect TEE3/4" to end of NKT3/4" X 36" Tubing and NKT3/4" X 12" to other ends. Use CLAMP # 56 to secure Tubing. Slip R1 Restrictor over Tubing that will fill Bowl (SEE ILLUSTRATION).
8. As you place 6614 Bowl on top of 6615 and feed Tubing through 6614 Bowl. Level 6614 with shims if necessary.
9. Connect STP2" X 8" Stand P to 6614 and feed Tubing through it. Connect TEE3/4" X 1/2" X 1/2" to Tubing from 6614 and use CLAMP # 56 to secure it. Connect NKT1/2" X 12" to the other two ends of Tee. Use CLAMP #38 to secure Tubing. Slip R1 Restrictor to Tubing that will fill Bowl (SEE ILLUSTRATION).
10. As you place 6613 Bowl on top of 6614 feed Tubing through the 6613 Bowl. Level 6613 with shims if necessary.
11. Connect STP2" X 3.5" Stand Pipe to 6613. Slip R1 Restrictor to Tubing.
12. Connect ADAPTER 1/2" MNPT X 1/2" BARB to the bottom of 5513.
13. As you place 5513 Finial on top of 6613 Bowl connect Tubing to Adapter from 5513 Finial.
14. Fill all basins and pool with water. Plug pump into 110V GFCI protected outlet.
15. Adjust R1's as necessary to control water flow.
16. Finally, place the four 9024 Surround Sections around the fiberglass pool and align evenly.

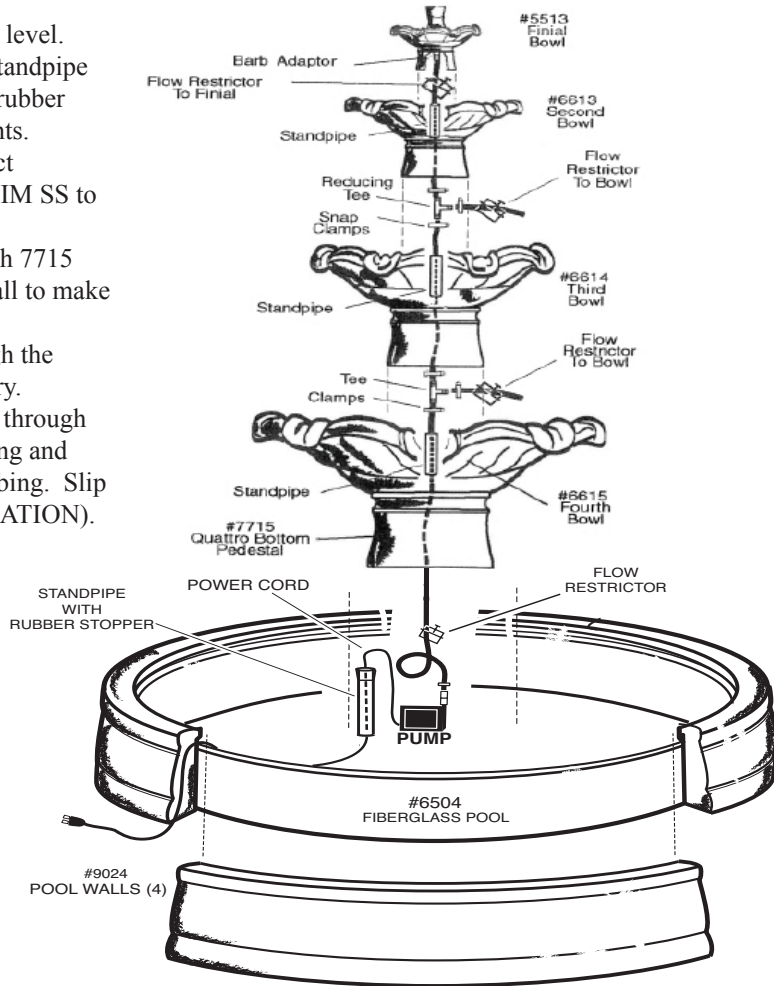

IMPORTANT - WINTER CARE:

Do not allow water to collect and freeze in fountain bowl(s) or shell(s). Do not allow fountain pieces to sit in a pool of ice. Disassemble entire fountain and pump and store indoors during the winter season.

If you cannot store your fountain indoors during the winter season, you must at least protect it from ice collection or exposure: first, remove the statue(s) and pump, storing them inside if possible. Next, locate the drain plug on the underside of bowl(s) or shell(s). Remove the drain plug to drain any water "trapped" between the walls of the bowl(s) or shell(s). Then fill the bowl(s) or shell(s) with an absorbent material, such as burlap, blankets, etc. Finally, cover the entire fountain with a Henri Fountain Cover. Should condensation droplets form on the inside of the cover, the material will absorb them.

By following these simple and sensible precautions during the winter season, you will protect your fountain for years of beauty and enjoyment!

CAUTION: The use of Chlorine or Chlorine Bleach may damage the finish of your fountain. When cleaning your fountain, it is best to test the cleaning agent on an underside or back surface to determine the agent's suitability. We recommend the use of a mild, non-abrasive treatment, such as Henri Lime Remover and Preventer. To avoid foaming, thoroughly rinse the fountain to remove the entire cleaning agent.