

SETTING UP THE 5649F9 (or 5649F5)

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Set the 6504 Fiberglass Pool on your prepared site. (Make note first of the underside of the pool and consider which direction you wish to pull your power cords.)

2) Place the pump next to the pool's standpipe. Slip the pump power cord down through the standpipe, pulling the cord out from underneath the pool toward your power source. Open the slit in the rubber stopper (with smaller hole) and place it around the power cord. Close the slit and push the stopper into the standpipe to keep the pool watertight.

3) If you are installing lights, you must run the power cords down through the standpipe and out to the side in the same way. If you are installing lights at a higher level than in the 6504 Pool, you will need to line up the fountain pieces just outside the pool – perhaps on their side – so you can set the light in its place and string the power cord down through the pieces, through the standpipe, then out the side of the pool.)


4) Insert the larger barbed adapter into the pump and press one end of the water tube onto it. As you set the 7647 Pedestal in the pool's center, pull the water tube up through the middle of it. Measure the distance from the pedestal to the inner wall of the pool to make sure it is centered.

5) Again, feed the water tube up through the 6648 Bowl as you carefully place this bowl on the pedestal. Then, open the slit in the large-holed stopper, place around the water tube close to the floor of the bowl, and press the stopper firmly into the bowl.

6) Pull the water tube up through the 7648 Pedestal as you set it in place. Thread the smaller barbed adapter into the bottom of the 5648 Finial/Bowl unit. Then, push the top end of the water tube over the adapter's barb as you set the 5648 unit down on the pedestal.

7) Fill all bowls and pool with water. Read pump instructions. Turn on the pump. If it does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

8) As long as all looks good and no shimming or leveling needs to be done, push the 9024 Pool Wall units evenly into place around the 6504 Pool. Csd

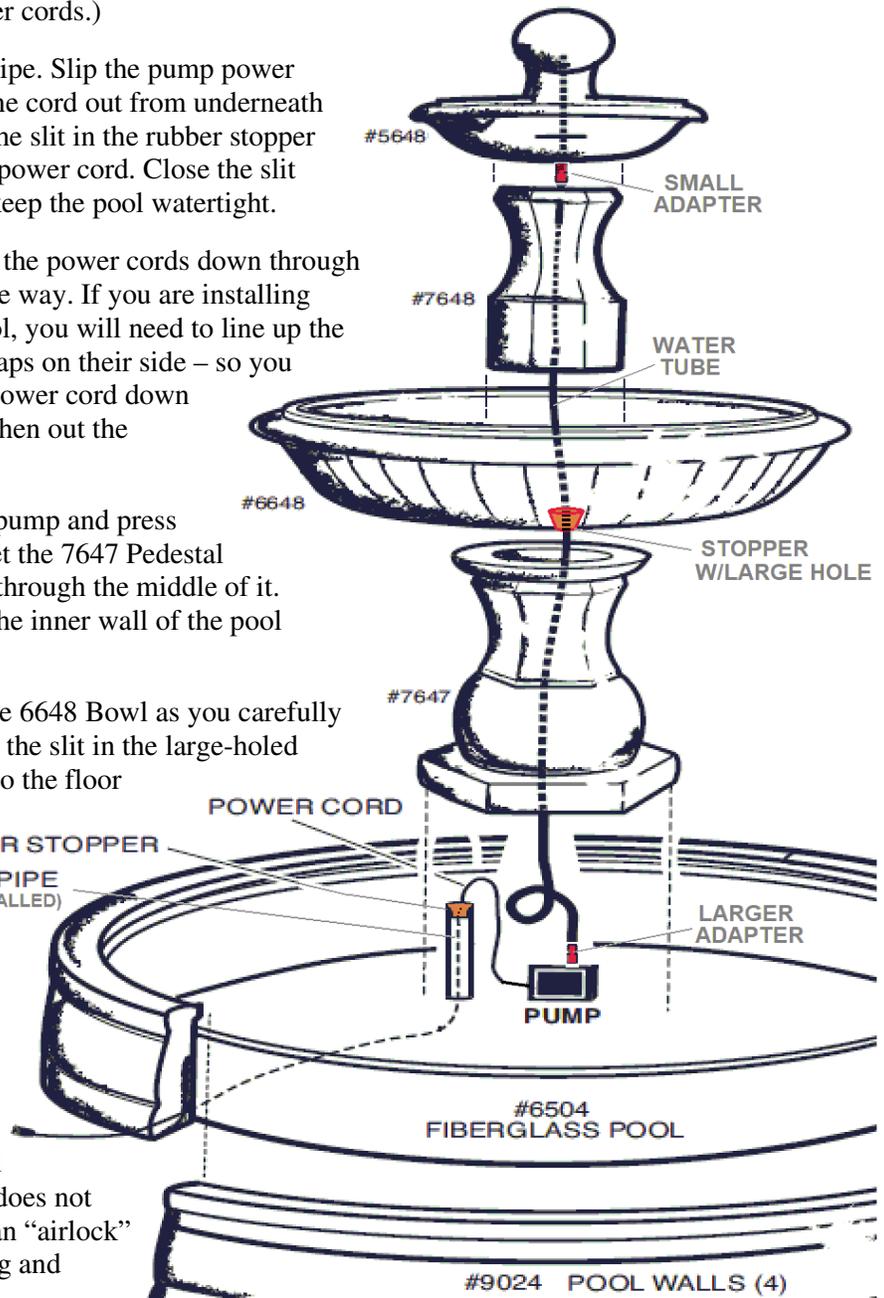

Online Resources
Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

6/2023

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.