

SETTING UP THE 5853F3

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Place the 7853 Pedestal on your prepared setting and make sure it will remain stable.


2) Set the 6853 Bowl on the Pedestal. Place the pump in the middle of the bowl and push its power cord down through the hole in the middle of the bowl. With help tipping the pedestal a bowl slightly, pull the cord out from under the pedestal and direct it toward your power supply.

3) Open the slit in the Stopper and place around the pump power cord a few inches from the pump. Close the stopper and press into place in the bowl. Leave about 1/8" of the stopper above the hole for easier future removal.

4) Insert the Tube Adapter into the top of the pump. Push the water tube onto the tube adapter. Install the Flow Restrictor on the water tube about 6 inches above the pump. Tighten just enough to hold it in place. (This can be tightened more later if you want to reduce the water flow.)

5) With help, lower the 5853 Finial over the bowl – pushing the water tube up and into it as you lower it all the way onto the bowl.

6) Fill the bowl with water. Read pump instructions. Turn on the pump. If it does not immediately begin working, there may be an “airlock” within the impeller chamber. Simply unplug and plug in a few times and it should start. Csd 5/2022

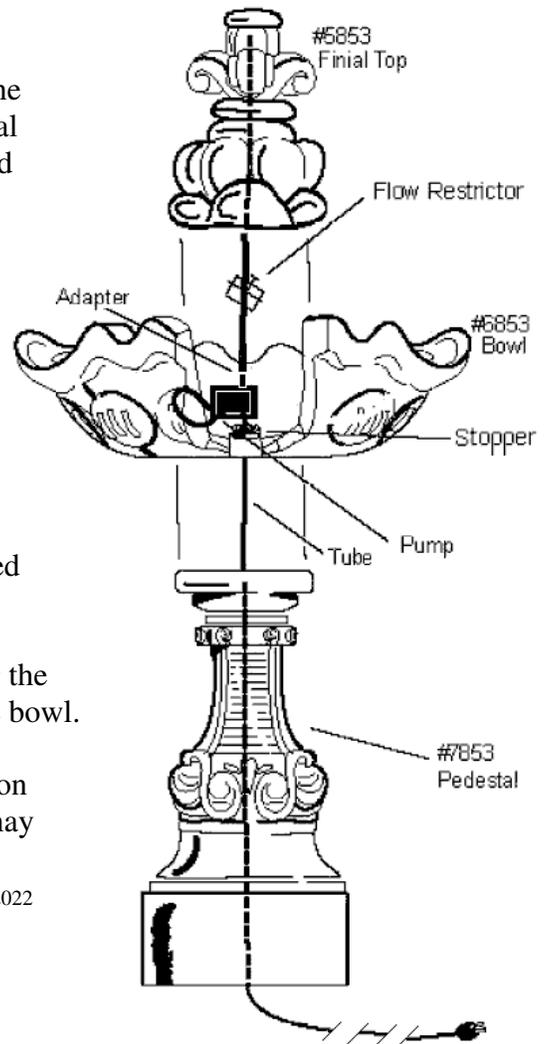

Online Resources
Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.